


EX/OP Series Switches

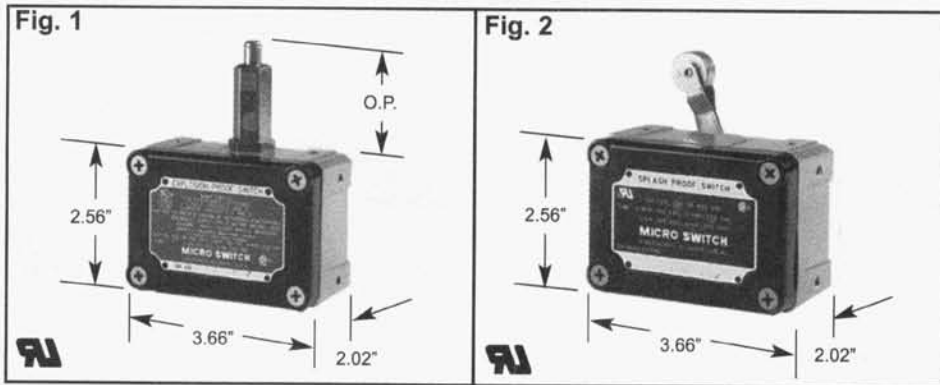

EX Explosion-Proof Switches* *

Actuator Style	Ratings	O.F.	P.T. Max In./Degrees	O.T. Min In./Degrees	D.T. Max In./Degrees	O.P. Inches	Part Number	Fig. No.
Overtravel Plunger	15 Amps ¹	3	.078	.188	.004	1.859.125	EX-Q	1
Roller Lever♣	15 Amps ¹	.5-1.25 lb.	.219 (8°)	90°	.007 (0.25°)	----	EX-AR	2
Roller Lever♥	15 Amps ¹	2.5 lb. max.	.065	25°	.007 (0.25°)	----	EX-AR30	2

** NEMA Standards: 1, 7 and 9. Some are UL listed and CSA certified; Class I, Group B, C and D; Class II, Group E, F and G.

OP Moisture-Contaminant Resistant Switches ♦

Actuator Style	Ratings	O.F.	P.T. Max In./Degrees	O.T. Min In./Degrees	D.T. Max In./Degrees	O.P. Inches	Part Number	Fig. No.
Roller Lever	15 Amps ¹	.5-1.25 lb.	.219 (8°)	90°	.007 (0.25°)	----	OP-AR	2

Roller Lever is field adjustable through 360°.

♦ Meets NEMA 1, 3, 4 and 13.

Replacement Parts for EX Switches

Switch	Switching Unit	Actuator	Springs
EX-AR	BZ-2R-P1 ²	6PA5-EX	33PA7-EX
EX-AR30	BZ-2R-P1 ²	6PA5-EX	33PA5-EX
EX-Q	BZ-2R-P1 ²	8PA15-EX	----

Replacement Parts for OP Switches

Switch	Switching Unit	Actuator	Springs
OP-AR	BZ-2R-P4	6PA6-OP	33PA7-EX

CHARACTERISTICS:

O.F. - Operating Force; R.F. - Release Force; P.T. - Pretravel; O.T. - Overtravel; D.T. - Differential Travel; O.P. - Operating Position.

¹ UL/CSA Rating L96, SPDT, 15 Amps, 125, 250 or 480 VAC; 1/8 Hp, 125 VAC; 1/4 Hp, 250 VAC; 1/2 Hp, 125 VDC; 1/4 Amp, 250 VDC.

² Side facing 8-32 x .218" screw cap with cup washer and small fiberglass insulator.

♣ Clockwise actuation when looking at nameplate.

♥ Counter clockwise actuation when looking at nameplate.

Mounting Hole Dimension:

